



Warranty: One (1) year parts and labour

## Advanced Cooking Technology

- 1000 W Cooking Power
- Bottom Energy Feed
- See-Through Oven Door

---

## Functional Design


- Stainless Steel Front
- Compact Footprint
- Grab & Go Handle

---

## Flexible & Easy to Use

- Rotary Auto Reset Dial
- 6-Minute Electronic Timer
- Easy to Setup & Maintain

Model Info	Model Number	NE-1025CC
	Oven Type	Light Duty Commercial MWO
	Capacity	0.8 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Bottom)
	Microwave Cooking Levels	1 Levels
	Stage Cooking	1 Stages
	Defrost	-
	Timer	Yes (up to 6 minutes Rotary with Auto Reset)
	Customizable Menu	-
Cooking Power	Microwave*	1000 W
Design	Control Panel	Rotary Dial
	Cabinet Construction	Stainless Steel
	Cool Touch Cabinet	Yes
Specifications	Power Source	120V AC 60HZ, Single Phase
	Power Requirement	1500 W
	Current Requirement	13.4 A
	Receptacle Requirement	15A/20A (NEMA 5-15R/5-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs)	Approx. 16 kg (35 lbs)
	Outer Dimensions WxDxH mm (Measurements in Inches)	510 x 415 x 306 mm (20-5/64" x 16-22/64" x 12-3/64" )
	Cavity Dimensions WxDxH mm (Measurements in Inches)	330 x 330 x 205 mm (12-63/64" x 12-63/64" x 8-5/64" )
	Safety Certification	CSA

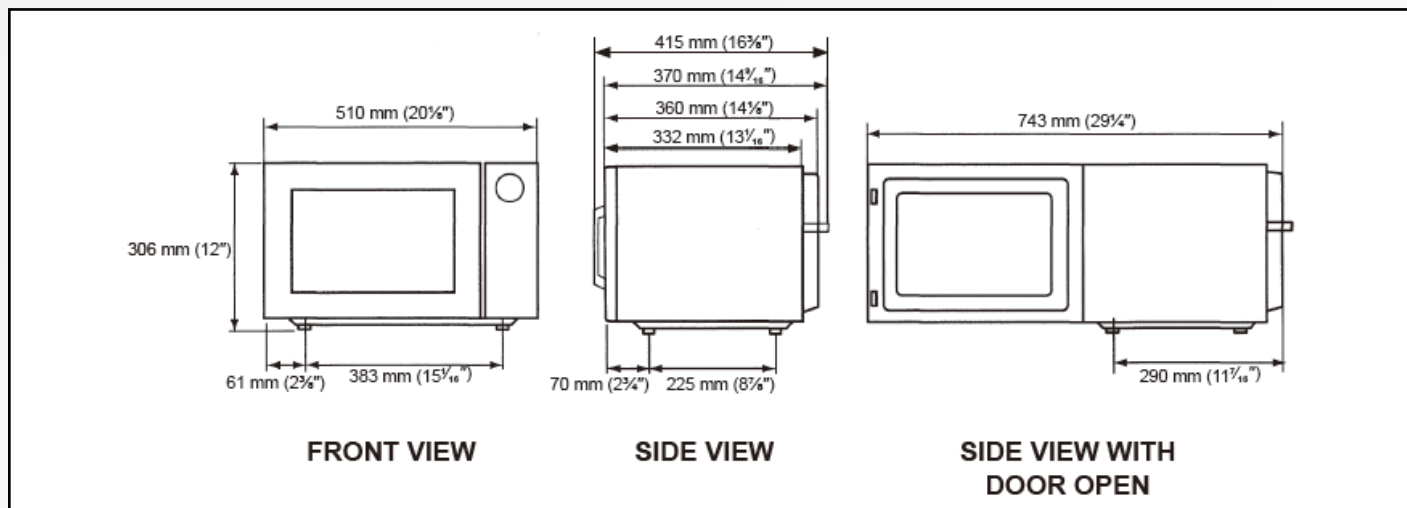

\*IEC Test Procedure. Specifications subject to change without notice.



Warranty: 1 year parts and labour / 2nd and 3rd year limited warranty

## Advanced Cooking Technology

- 1000 W Cooking Power
- Bottom Energy Feed
- 6 Power Levels (1-3 Stages)

---

## Functional Design


- Stainless Steel Front
- Compact Footprint
- Grab & Go Handle

---

## Flexible & Easy to Use

- Touch pad with LCD Display
- 10 Programmable Memory Pads
- Easy to Setup & Maintain

Model Info	Model Number	NE-1054CC
	Oven Type	Light Duty Commercial MWO
	Capacity	0.8 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Bottom)
	Microwave Cooking Levels	6 Levels
	Stage Cooking	1-3 Stages
	Defrost	Yes
	Timer	99min. 99 sec. (Digital)
	Customizable Menu	10 programable pads with 20 memory slots
Cooking Power	Microwave*	1000 W
Design	Control Panel	Keypad with LCD Display
	Cabinet Construction	Stainless Steel
	Cool Touch Cabinet	Yes
Specifications	Power Source	120V AC 60HZ, Single Phase
	Power Requirement	1500 W
	Current Requirement	13.4 A
	Receptacle Requirement	15A/20A (NEMA 5-15R/5-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs)	Approx. 16 kg (35 lbs)
	Outer Dimensions WxDxH mm (Measurements in Inches)	510 x 360 x 306 mm (20-5/64" x 14-11/64" x 12-3/64" )
	Cavity Dimensions WxDxH mm (Measurements in Inches)	330 x 330 x 205 mm (12-63/64" x 12-63/64" x 8-5/64" )
	Safety Certification	CSA

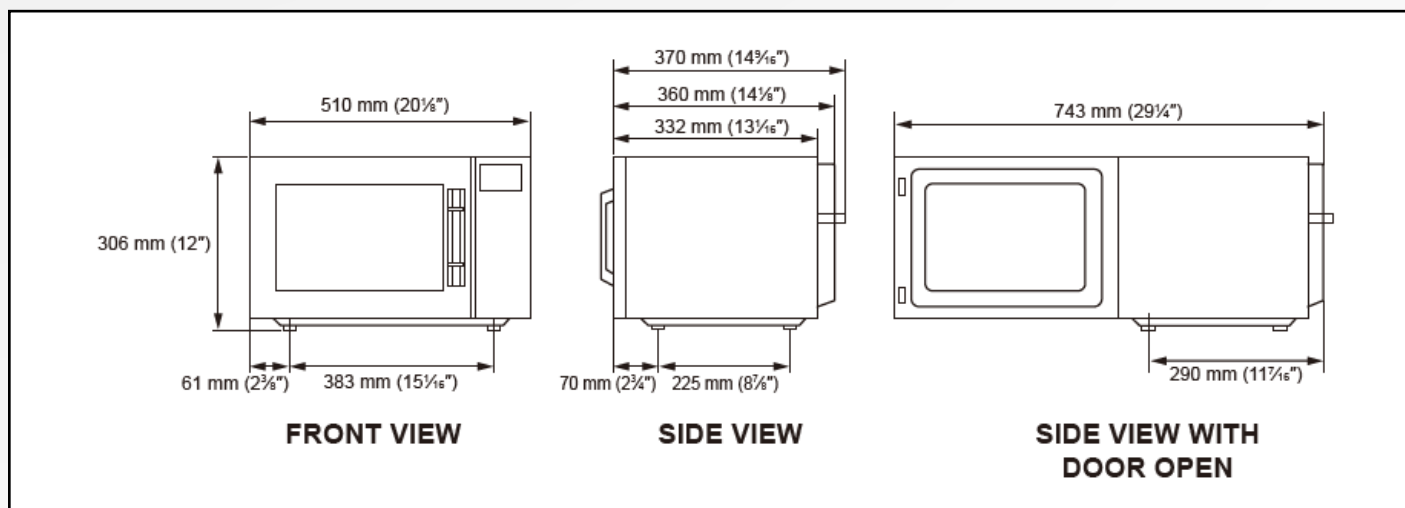

\*IEC Test Procedure. Specifications subject to change without notice.



Warranty: One (1) year parts and labour / 2nd and 3rd year limited warranty

## Advanced Cooking Technology

- 1000 W Cooking Power
- Bottom Energy Feed
- 6 Power Levels (1-3 Stages)

---

## Functional Design


- Stainless Steel Front
- Compact Footprint
- Grab & Go Handle

---

## Flexible & Easy to Use

- Touch pad with LCD Display
- 10 Programmable Memory Pads
- Easy to Setup & Maintain

Model Info	Model Number	NE-1064CC
	Oven Type	Light Duty Commercial MWO
	Capacity	0.8 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Bottom)
	Microwave Cooking Levels	6 Levels
	Stage Cooking	1-3 Stages
	Defrost	Yes
	Timer	99min. 99 sec. (Digital)
	Customizable Menu	10 programable buttons with 20 memory slots
Cooking Power	Microwave*	1000 W
Design	Control Panel	Keypad with LCD Display
	Cabinet Construction	Stainless Steel
	Cool Touch Cabinet	Yes
Specifications	Power Source	120V AC 60HZ, Single Phase
	Power Requirement	1500 W
	Current Requirement	13.4 A
	Receptacle Requirement	15A/20A (NEMA 5-15R/5-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs)	Approx. 16 kg (35 lbs)
	Outer Dimensions WxDxH mm (Measurements in Inches)	510 x 360 x 306 mm (20-5/64" x 14-11/64" x 12-3/64" )
	Cavity Dimensions WxDxH mm (Measurements in Inches)	330 x 330 x 205 mm (12-63/64" x 12-63/64" x 8-5/64" )
	Safety Certification	CSA

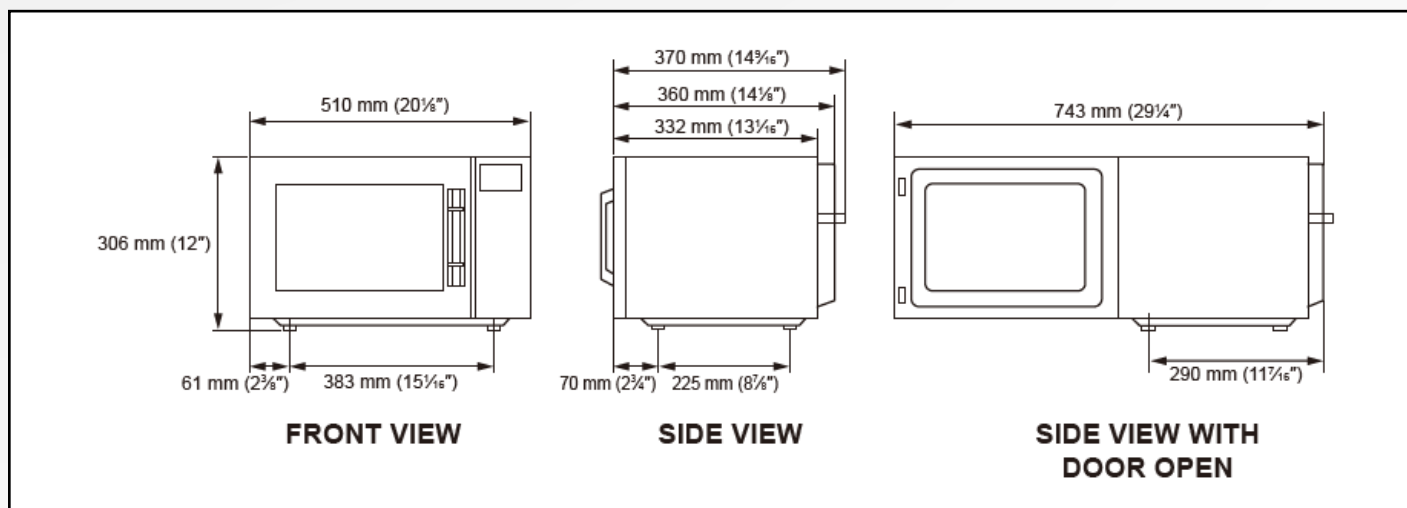

\*IEC Test Procedure. Specifications subject to change without notice.



Warranty: Three (3) years parts and labour

## Advanced Cooking Technology

- High Power Microwave (2100/1700/1200 W)
- Top/Bottom Dual Independent Energy Feed
- 15 Power Levels (1-5 Stages)

---

## Functional Design


- Stainless Steel Construction
- Stackable & Compact
- Grab & Go Handle

---

## Flexible & Easy to Use

- Touch pad with LCD Display
- 10 Pre-Programmable Menu Options
- Programmable (30 Menu Options)
- Easy to Setup & Maintain

Model Info	Model Number	NE-1252C
	Oven Type	Heavy Duty Commercial MWO
	Capacity	0.6 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Dual, Top/Bottom)
	Microwave Cooking Levels	15 Levels
	Stage Cooking	1-5 Stages
	Defrost	Yes
	Timer	Yes Maximum times for each stage of cooking: Times vary for each (of 15) power levels (See Manual)
	Customizable Menu	10 programable buttons with 30 memory slots
Cooking Power	Microwave	1200 W*
Design	Control Panel	Keypad with Digital LCD Display
	Cabinet Construction	Stainless Steel
	Stackable	Yes
	Cool Touch Cabinet	Yes
	Removable Air Filter	Yes
Specifications	Power Source	120V 60HZ, Single Phase
	Power Requirement	1970 W
	Current	17.1 A
	Receptacle Requirement	20 AMP (NEMA #5-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs) (approx.)	25.5 kg (56 lbs.)
	Outer Dimensions W x D x H mm (Measurements in Inches)	422 x 508 x 337 mm (16-39/64" x 20" x 13-17/64")
	Cavity Dimensions W x D x H mm (Measurements in Inches)	330 x 310 x 175 mm (12-63/64" x 12-13/64" x 6-57/64")
	Safety Certifications	CSA

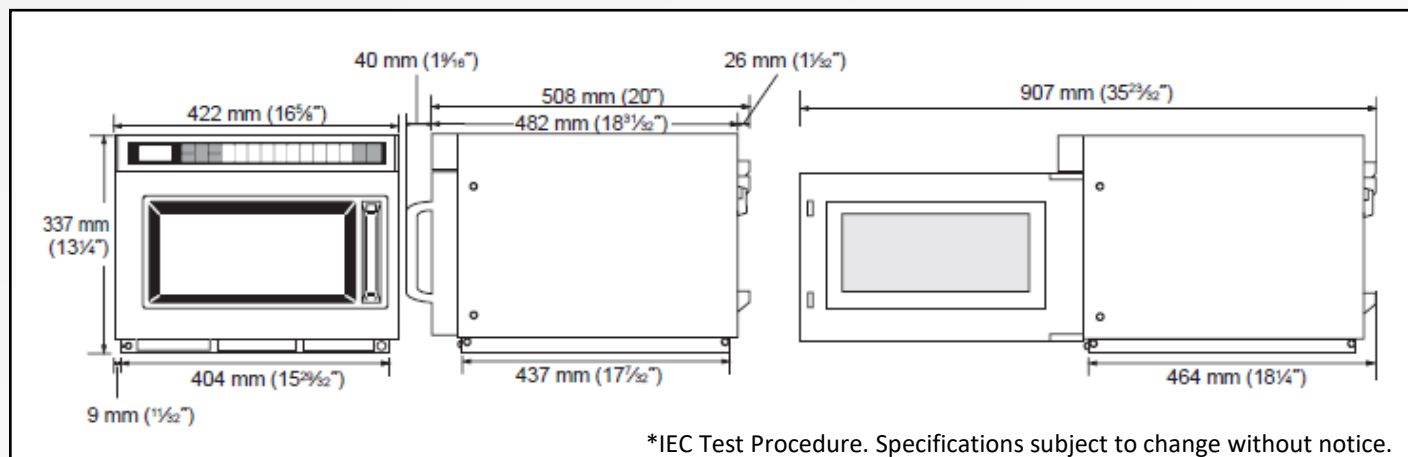





Warranty: Three (3) years parts and labour

## Advanced Cooking Technology

- High Power Microwave (2100/1700/1200 W)
- Top/Bottom Dual Independent Energy Feed
- 15 Power Levels (1-5 Stages)

---

## Functional Design


- Stainless Steel Construction
- Stackable & Compact
- Grab & Go Handle

---

## Flexible & Easy to Use

- Touch pad with LCD Display
- 10 Pre-Programmable Menu Options
- Programmable (30 Menu Options)
- Easy to Setup & Maintain

Model Info	Model Number	NE-1752C
	Oven Type	Heavy Duty Commercial MWO
	Capacity	0.6 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Dual, Top/Bottom)
	Microwave Cooking Levels	15 Levels
	Stage Cooking	1-5 Stages
	Defrost	Yes
	Timer	Yes Maximum times for each stage of cooking: Times vary for each (of 15) power levels (See Manual)
	Customizable Menu	10 programable buttons with 30 memory slots
Cooking Power	Microwave	1700 W*
Design	Control Panel	Keypad with Digital LCD Display
	Cabinet Construction	Stainless Steel
	Stackable	Yes
	Cool Touch Cabinet	Yes
	Removable Air Filter	Yes
Specifications	Power Source	208/230V AC 60HZ, Single Phase
	Power Requirement	2610 W
	Current	13.5A (208V) / 12.2A (230V)
	Receptacle Requirement	15 AMP (NEMA #6-15R) / 20 AMP (NEMA #6-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs) (approx.)	27.5 kg (61 lbs.)
	Outer Dimensions W x D x H mm (Measurements in Inches)	422 x 508 x 337 mm (16-39/64" x 20" x 13-17/64")
	Cavity Dimensions W x D x H mm (Measurements in Inches)	330 x 310 x 175 mm (12-63/64" x 12-13/64" x 6-57/64")
	Safety Certifications	CSA

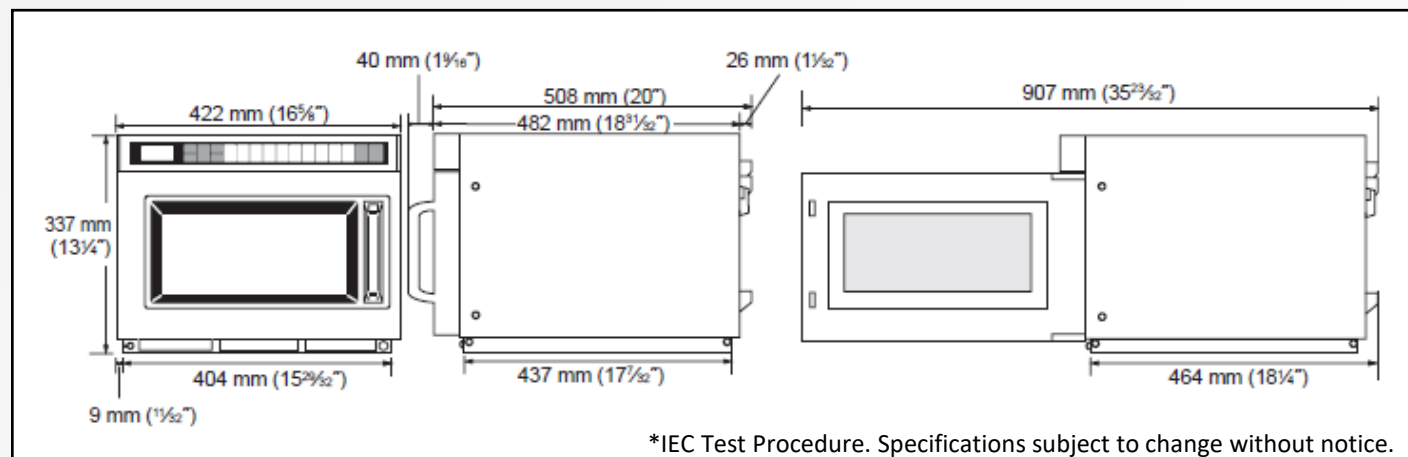



Warranty: Three (3) years parts and labour

## Advanced Cooking Technology

- High Power Microwave (2100/1700/1200 W)
- Top/Bottom Dual Independent Energy Feed
- 15 Power Levels (1-5 Stages)

---

## Functional Design

- Stainless Steel Construction
- Stackable & Compact
- Grab & Go Handle

---

## Flexible & Easy to Use

- Touch pad with LCD Display
- 10 Pre-Programmable Menu Options
- Programmable (30 Menu Options)
- Easy to Setup & Maintain

Model Info	Model Number	NE-2152C
	Oven Type	Heavy Duty Commercial MWO
	Capacity	0.6 cuft.
Cooking Technology	Microwave (Energy Feed)	Yes (Dual, Top/Bottom)
	Microwave Cooking Levels	15 Levels
	Stage Cooking	1-5 Stages
	Defrost	Yes
	Timer	Yes Maximum times for each stage of cooking: Times vary for each (of 15) power levels (See Manual)
	Customizable Menu	10 programable buttons with 30 memory slots
Cooking Power	Microwave	2100 W*
Design	Control Panel	Keypad with Digital LCD Display
	Cabinet Construction	Stainless Steel
	Stackable	Yes
	Cool Touch Cabinet	Yes
	Removable Air Filter	Yes
Specifications	Power Source	208/230V AC 60HZ, Single Phase
	Power Requirement	3120 W
	Current	16.1A (208V) / 14.7A (230V)
	Receptacle Requirement	20 AMP (NEMA #6-20R)
	Operating Frequency	2450 MHz
	Net Weight in kg (lbs) (approx.)	29.5 kg (65 lbs.)
	Outer Dimensions W x D x H mm (Measurements in Inches)	422 x 508 x 337 mm (16-39/64" x 20" x 13-17/64")
	Cavity Dimensions W x D x H mm (Measurements in Inches)	330 x 310 x 175 mm (12-63/64" x 12-13/64" x 6-57/64")
	Safety Certifications	CSA

